




Dimensions of Cap

ابعاد درپوش

Dimension According to ANSI B16.9

Nominal Pipes size	Outside Diameter D	Wall Thickness		Centre to End E	Weight Kg.	
		Standard t	Extra Strong t		Standard	Extra Strong
1/2	21.34	2.77	3.73	25.40	0.03	0.04
3/4	26.67	2.87	3.91	25.40	0.06	0.08
1	33.40	3.38	4.55	38.10	0.10	0.12
1 1/4	42.16	3.56	4.85	38.10	0.14	0.18
1 1/2	48.26	3.68	5.08	38.10	0.16	0.22
2	60.32	3.91	5.54	38.10	0.23	0.32
2 1/2	73.02	5.16	7.01	38.10	0.37	0.47
3	88.90	5.49	7.62	50.80	0.65	0.85
4	114.30	6.02	8.56	63.50	1.15	1.58
5	141.30	6.55	9.52	76.20	1.90	2.65
6	168.27	7.11	10.97	88.90	2.92	4.30
8	219.07	8.18	12.70	101.60	5.07	7.60
10	273.05	9.27	12.70	127.00	9.10	12.00
12	323.85	9.52	12.70	152.40	13.40	17.20
14	355.60	9.52	12.70	165.10	16.10	20.50
16	406.40	9.52	12.70	177.80	20.30	26.20
18	457.20	9.52	12.70	203.20	26.00	33.50
20	508.00	9.52	12.70	228.60	32.20	42.60
22	558.80	9.52	12.70	254.00	42.00	51.00
24	609.60	9.52	12.70	266.70	46.20	59.40

CAPS

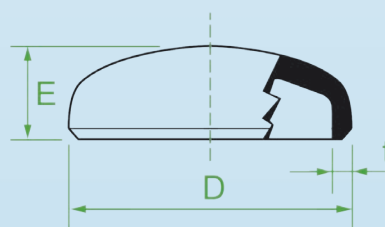

تابان فولاد زنجان
Taban Foolad Zanjan



نشانی: زنجان، شهرک صنعتی شماره ۱، خیابان دی
تلفن: ۲۲۲ ۱۲۱۲ و ۲۲۲ ۱۷۳۳-۴ (۰۲۴۱)
فاکس: ۲۲۲ ۱۲۱۳ (۰۲۴۱)

Add: Dey Ave. Zanjan Industrial city (1), ZANJAN - IRAN
TEL: +98 241 222 1212 & 222 1733 - 4
FAX: +98 241 222 1213

www.taban-foolad.com

info@taban-foolad.com